



PLM 10000Q



PLM 10000Q Powered Loudspeaker Management system

The two- input, four- output PLM 10000Q seamlessly integrates networked digital signal distribution, drive processing, power amplification, and load verification plus performance monitoring in a single hardware unit and unified software controller. This new approach,

designated Powered Loudspeaker Management (PLM), is a cohesive blend of Lake® Processing and Lab.gruppen power. As a complete system, the PLM 10000Q affords significant benefits when compared to conventional approaches utilizing separate components.

Lab.gruppen Technology

- ▶ 2350 W per channel @ 2 ohms**
- ▶ 2300 W per channel @ 4 ohms**
- ▶ 2U chassis weighing only 13.5 kg (30 lbs)
- ▶ Class TD® output stage
- ▶ Regulated Switch Mode Power Supply (R.SMPS™)
- ▶ Copper-finned Intercooler® with transverse-mounted output devices
- ▶ Full suite of protection and fault monitoring features
- ▶ Comprehensive loudspeaker preset database
- ▶ LoadLibrary™ load “Fingerprint” (identity and characteristics) data
- ▶ Comprehensive LoadSmart™ load verification and SpeakerSafe™ continuous loudspeaker performance monitoring
- ▶ Dante™ low-latency digital network included as standard
- ▶ Fully compatible with Dolby Lake Processor, Lake Contour™, and Lake Mesa Quad EQ™ and Mesa Parametric EQ™ devices
- ▶ Primary and secondary network connections (for daisy chaining or system redundancy)
- ▶ Digitally controlled “amplifier gain” adjustable in 0.1 dB steps from 22 to 44 dB
- ▶ Digital output attenuation in 0.25 dB steps from -inf to 0 dB
- ▶ Binding post or Neutrik® Speakon® (1 x NLT8, 2 x NLT4) power output connectors
- ▶ Digitally implemented, zero-overshoot Inter-Sample Voltage Peak Limiting (ISVPL™) adjustable in 0.1 V steps from 17.8 to 153 V
- ▶ Power Average Limiter (PAL)
- ▶ High-brightness front-panel LCD display
- ▶ Moisture resistant silicone touchpad for front-panel display mode selection and menu navigation

** More power available when driven asymmetrically.

Lake Processing Technology



- ▶ Raised Cosine Equalization™
- ▶ Linear phase and classical crossovers
- ▶ LimiterMax™ – peak and RMS limiters
- ▶ Iso-Float™ ground isolation
- ▶ Super Module capability
- ▶ Integration of third party frequency measurement and analysis system via the Lake Analyzer Bridge
- ▶ Analog and AES digital inputs with loop-thru outputs
- ▶ Auto-select input router for all inputs with user definable priorities

Powered Loudspeaker Management: Technology Overview

Power Amplifier

Although based on technology in Lab.gruppen's road-proven FP+ Series, the amplifier platform in the PLM 10000Q Powered Loudspeaker Management system incorporates further enhancements for even greater sustained output power. The basic output topology remains Lab.gruppen's patented Class TD (offering Class D efficiency with the sonic purity of Class B designs), but with new circuitry for substantially greater current-carrying capabilities. The Regulated Switch Mode Power Supply (R.SMPS) is optimized to deliver full power during long low-frequency bursts, as well as maintain stable rail voltages despite fluctuating line voltage. The PLM Series also offers extreme power density, patented Intercooler cooling, a full suite of protection features, and a Power Average Limiter (PAL) to prevent tripping of mains breakers.

Load Verification and Continuous Performance Monitoring

The PLM 10000Q includes a revolutionary set of tools for fast, accurate load verification and real-time performance monitoring. The key to both features is the LoadLibrary, a comprehensive database that provides unique "Fingerprints" (load characteristics) for each loudspeaker model in the system. Using this data and on-board DSP, LoadSmart compares predicted response (using a brief test signal) to the actual response, instantly identifying potential problems. When activated, SpeakerSafe real-time performance monitoring helps the operator avoid power compression and provides ongoing detailed critical information about system-wide driver integrity.

Lake Processing

The PLM 10000Q contains four full-featured Lake Processing modules, each offering precise settings for gain, delay, cross-over slope, equalization, and limiting. Exclusive Lake Processing algorithms are included for Raised Cosine Equalization, linear phase crossovers, LimiterMax loudspeaker protection, and Iso-Float ground isolation. Raised Cosine Equalization is the foundation for the Lake Mesa EQ and the Ideal Graphic EQ, the two revolutionary EQ interfaces used by the Dolby Lake Processor. Mesa EQ offers asymmetric filtering to match the asymmetric responses of many loudspeaker systems. The Ideal Graphic EQ offers true sum-to-flat response, so the adjustments provide uniform boost and cut along with greater selectivity.

Lake Processing also offers both classical crossovers (selectable up to 48 dB per octave) and linear phase crossovers. Capable of slopes exceeding 180 dB per octave, linear phase crossovers offer greater control to limit lobing and off-axis cancellation.

Lake Controller software

Lake Controller software provides a unified interface for control and monitoring of all functions of the Powered Loud-

speaker Management system. In addition to controlling all parameters of standard Lake Processing (therefore appropriate for use with Dolby Lake Processors), all new versions provide control and monitoring of exclusive PLM features: digital input gain and attenuation, and load verification and performance monitoring via LoadSmart and SpeakerSafe.

The flexible Lake Controller software environment can control extensive networks of powered loudspeaker management systems from a single computer. The user interface is based on discrete processing modules, with each module assigned to power outputs normally defined for sets of band-limited drivers (e.g. low, mid, high, subs). Adjustments can be made in real time to any parameter of any module on the network. Modules may be assigned to groups representing subsystems in larger systems, such as main arrays, delays, and fills in an arena system. Because each module can be assigned to more than one group, the Lake Controller can simultaneously address multiple groups for global adjustments as needed while maintaining independent control of separate subsystems and individual components.

The Super Module functionality allows a single on-screen module interface to control output channels in different PLM units. For example, a three-way Super Module could be configured using a high-power LF channel in one PLM unit along with lower-powered MF and HF channels in a different unit.

The Lake Controller software is optimized for a wireless Tablet PC. Operation is easy and intuitive, with the "feel" of real-time analog faders and controls. The same Lake Controller interface can be used to operate Dolby Lake Processors, Lake Contour, and Lake Mesa Quad EQ processors as part of a unified system.

Another Lake Controller software feature is seamless integration with third party real-time sound system measurement, optimization, and control software packages via the Lake Analyzer Bridge. Users can measure spectrum and transferfunction and adjust system EQ at the same time, using the same user interface.

Dante Digital Audio Network


The PLM Series Powered Loudspeaker Management systems are equipped as standard with Dante, a self-configuring digital audio networking solution from Audinate® of Australia. Based on the newest developments in networking technology, Dante provides reliable, sample-accurate audio distribution over Ethernet with extremely low latency. Dante incorporates Zen™, an automatic device discovery and system configuration protocol which enables PLM Series products and other products with Dante (like Dolby Lake Processors) to find each other on the network and configure themselves.




PLM 10000Q Neutrik Speakon connector version shown.



The front panel is the “local control center” for the PLM 10000Q. An intuitive, menu driven interface allows quick access to key functions using the moisture resistant silicone touchpad. Information is clearly displayed on the daylight-readable, 2.5-inch LCD panel. The soft-button keypad and precision rotary encoder provide control of processing and amplification functions, with key lock available.

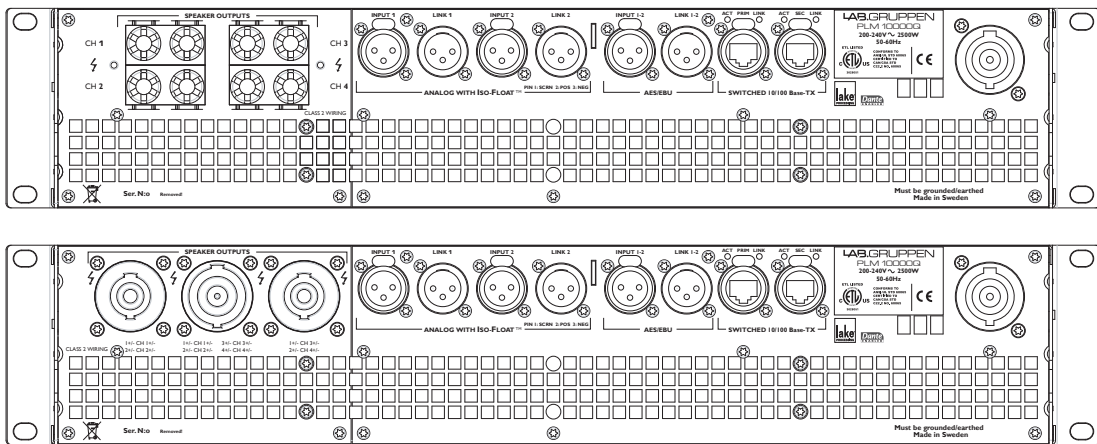

The PLM 10000Q is available with either binding posts or an “embedded patch panel” with Neutrik Speakon connectors (2 x NLT4 and 1 x NLT8). Common connectors include; 2 x analog input XLR with switchable Iso-Float, 2 channels of AES/EBU with link-through capability for daisy chaining, 2 x EtherCon® for linking or redundancy. A 32 amp PowerCon® connector is used for mains supply.

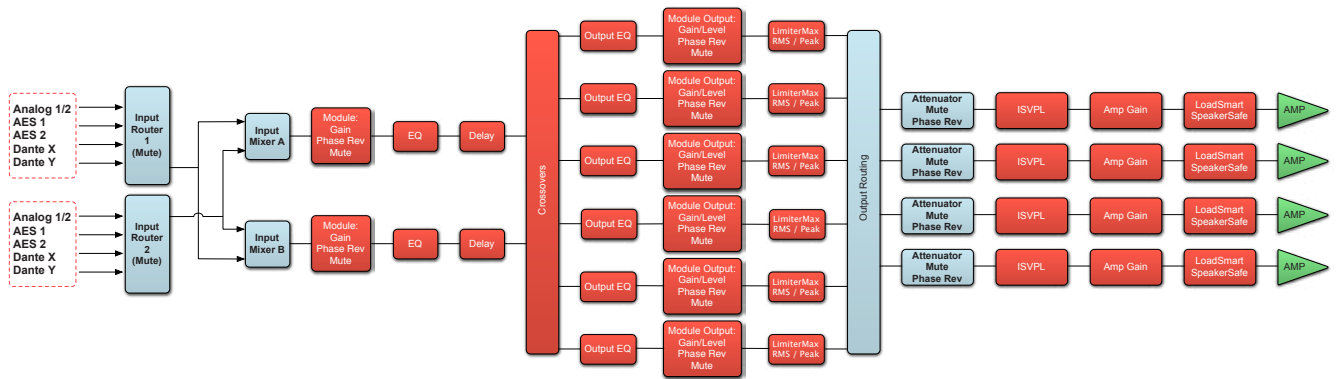

This signal flow block diagram illustrates the flexible mixing and routing, as well as the powerful signal processing capabilities, offered by the PLM Series. The input routers allow for redundant and prioritized inputs, with automatic switch over in case of signal failure. The input mixers provide mixing capabilities between the outputs of the two input routers. The two Lake Processing modules (covering all red blocks) provide user EQ, crossover and output filters along with gain adjustments, mute, phase reverse, delay, and limiters. Module outputs can be routed to either power output channel. Each power output channel provides individual channel attenuation, mute and phase reversal. Each power output channel also implements configurable amplifier gain and an advanced peak limiter in the ISVPL.

The flexible architecture of the PLM Series allows the settings for each unit to be stored in different hierarchies. The Lake Processing modules can be instantly configured with module files that are cross compatible with Dolby Lake products. Settings can also be stored and recalled on a system and subsystem level (system/subsystem files) as well as on a device level (frame presets).

Specifications PLM 10000Q

General					
Number of input channels	2				
Number of output channels	4				
Peak total output all channels driven	10800 W				
Max. Peak output voltage per channel	153 V				
Max. output current per channel	49 A peak				
Max. Output Power					
All channels driven	2 ohms	4 ohms	8 ohms	16 ohms	
Channels A and B, while channels C and D are driven at -3 dB ²⁾	2350 W	2300 W	1300 W	660 W	
All channels driven into optimal impedance interval	> 2700 W into 2.4 – 3.2 ohms				
Audio Performance					
THD + N 20 Hz - 20 kHz for 1 W	<0.05%				
THD + N at 1 kHz and 1 dB below clipping	<0.04%				
Dynamic range with digital inputs (for all supported sample rates)	>116 dB				
Dynamic range with analog inputs	>114 dB				
Frequency response (1 W into 8 ohms, 20 Hz - 20 kHz)	+/-0.05 dB				
Input Common Mode Rejection (CMR) 20 Hz to 1 kHz	> 78 dB				
Internal sample rate	96 k				
Internal data path	32 bit floating point				
Product propagation delay, best case (96 kHz AES)	1.61 ms				
Product propagation delay, analog input	1.68 ms				
Sample Rate Converters					
THD + Noise	0.00003 %, 20 Hz - 20 kHz, unweighted				
Analog to Digital inputs					
THD + Noise	0.00022 %, typical at 1 kHz unweighted at +26 dBu headroom setting				
	0.00033 %, typical at 20 Hz and 20 kHz unweighted at +26 dBu headroom setting				
AES / EBU inputs					
Supported resolutions	≤ 24 bit				
Supported sample rates	44.1, 48, 88.2, 96, 176.4, 192 kHz				
Dante Audio Network					
Supports redundant paths	Yes				
Flexible topology	Yes				
Network latency	0.8, 1.3 and 4 ms				
Device presets					
Local memory locations for the settings of the product	100				
Limiters					
Adjustable Inter-Sample Voltage Peak Limiter (ISVPL)	17.8 - 153 V, step size 0.1 V				
Current Peak Limiter < 300 ms	49 A peak				
Current Average Limiter (CAL) > 300 ms	25 Arms				
LimiterMax (rms and peak limiters)					
– MaxRMS (rms voltage limiter)	Yes				
– MaxPeak (peak voltage limiter)	Yes				
Gain					
Amplifier gain	22 - 44 dB, step size 0.1 dB				
Analog attenuator	-Inf to 0 dB, step size 0.25 dB				
Back panel interface					
AES / EBU / I/O (input + link)	2 x 3-pin XLR				
Analog, 2-channel I/O (input + link)	4 x 3-pin XLR, electronically balanced				
Output connectors	Neutrik Speakon (1 x NLT8, 2 x NLT4) or 4 Binding Posts (pairs) (must be specified upon order)				
Auto 10/100, Auto Uplink	2 x RJ45 EtherCon				
Control and monitoring interface	Via Ethernet for Lake Controller software				
Detachable mains cord	Neutrik PowerCon 32 A				
Cooling	Two fans, front-to-rear airflow, temperature controlled speed				
Front-panel user interface:					
Display, daylight readable LCD	2.5 inch				
Fault/Warning/Limit/Clip indicators	RGB LEDs				
Mute and soft function buttons	8 provided				
Standby Power button	On/Off				
Mute Enable button	Enables muting of outputs and inputs via soft-button keypad				
Meter button	Toggles through meter views				
Menu button	Provides a menu driven interface for full function front panel control				
Rotary Encoder	Yes				
Exit button	Provides a "back" function				
Power					
Operating voltage, 230 V / 115 V nominal ¹⁾	140-265 V / 70-135 V (45 - 66 Hz)				
Soft start / Inrush Current Draw	Yes / max. 5 A				
Mains Power Average Limiter (PAL)	Yes				
Dimensions (W/H/D)					
	W: 483 mm (19"), H: 88 mm (2 U), Overall D: 470 mm (18.5") deep including handles and rear support.				
Weight					
	13.5 kg (30 lbs.)				
Finish					
	Black painted steel chassis with black painted steel / aluminum front				
Approvals					
	CE, ANSI/JUL 60065 (ETL), CSA C22.2 NO. 60065, FCC				

Note 1): Separate 230 V or 115 V versions available. Not selectable on the product.

Note 2): Asymmetrically loading the output channels (as shown, for example): If one channel has reduced output power requirements, the voltage drop from the power supply will be reduced, resulting in a higher voltage and power output for the other channel.

All specifications are subject to change without notice.

Intercooler, Class TD and Lake are national and/or international registered trademarks of Lab.gruppen AB. PLM, Powered Loudspeaker Management, R.SMPS, LoadLibrary, LoadSmart, SpeakerSafe and ISVPL are trademarks of Lab.gruppen AB. Dolby and the double-D symbol are registered trademarks of Dolby Laboratories. Contour, Mesa Quad EQ, Mesa Parametric EQ, Raised Cosine Equalization, LimiterMax and Iso-Float are trademarks of Dolby Laboratories. Audinate is a registered trademark of Audinate Pty Ltd. Dante and Zen are trademarks of Audinate Pty Ltd. All other trademarks remain the property of their respective owners.

Copyright © 2009 Lab.gruppen AB.

All rights reserved.



LAB.GRUPPEN AB ▶ SWEDEN

INTERNATIONAL CONTACT ▶ INFO@LABGRUPPEN.COM | US & CANADA CONTACT ▶ INFO@TCG-AMERICAS.COM

WWW.LABGRUPPEN.COM

Item no. TDS-PLM10000Q_V11